


ADDITIONAL RIGHT-OF-WAY IS REQUIRED IF THE LIMITS OF PEDESTRIAN ACCESS ROUTE EXTEND BEYOND EXISTING OR PROPOSED VDOT RIGHT-OF WAY.


PEDESTRIAN ACCESS ROUTES PROVIDE A CONTINUOUS UNOBSTRUCTED, STABLE, FIRM AND SLIP RESISTANT PATH CONNECTING ALL ACCESSIBLE ELEMENTS OF A FACILITY THAT CAN BE APPROACHED, ENTERED AND USED BY PEDESTRIANS.

\* IF PEDESTRIAN ACCESS ROUTES ARE BEING PROVIDED, A MINIMUM 4' TRAVERSABLE WIDTH IS REQUIRED WITH A MAX. 2% CROSS SLOPE.


WHEN USED IN CONJUNCTION WITH STANDARD CG-3 OR CG-7, THE CURB FACE ON THIS STANDARD IS TO BE ADJUSTED TO MATCH THE MOUNTABLE CURB CONFIGURATION.




SECTION B-B



SECTION C-C



SECTION D-D

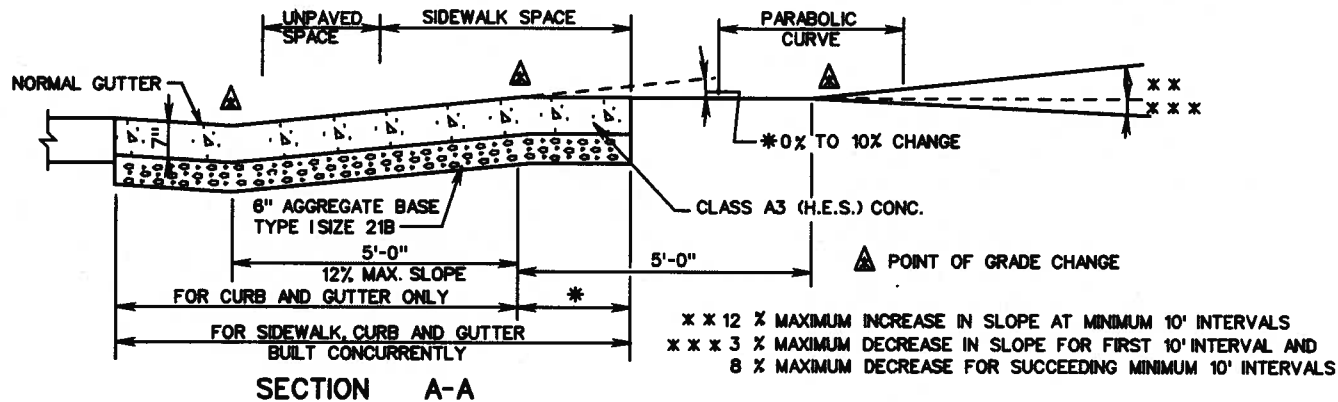

\* \* \* 12 % MAXIMUM INCREASE IN SLOPE AT MINIMUM 10' INTERVALS  
 \* \* \* 3 % MAXIMUM DECREASE IN SLOPE FOR FIRST 10' INTERVAL AND  
 8 % MAXIMUM DECREASE FOR SUCCEEDING MINIMUM 10' INTERVALS

VDOT

ROAD AND BRIDGE STANDARDS

SHEET 1 OF 1

REVISION DATE

203.03

## STANDARD ENTRANCE GUTTER

VIRGINIA DEPARTMENT OF TRANSPORTATION

SPECIFICATION  
REFERENCE

502